


# CT102B

230 Vac CONTROL UNIT

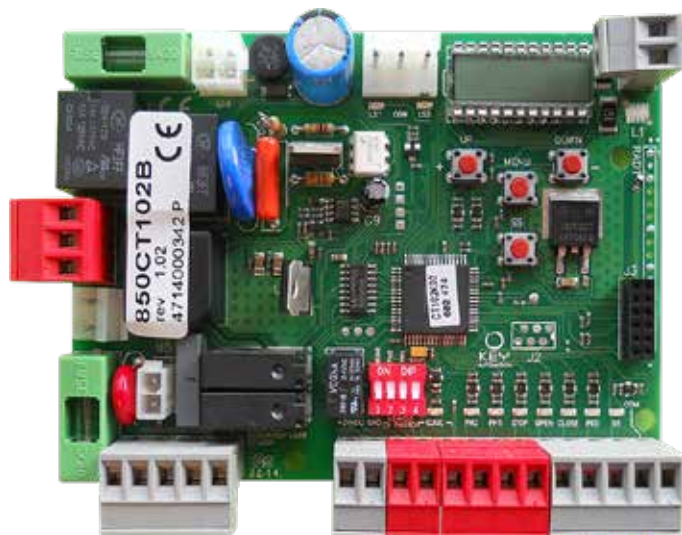

## PLUS

Same programming logic for all control boards CT102B, CT202, CT10224, CT20224 with run inversion via software

Amperometric obstacle detection with run inversion

Standard or programmable slowdown in opening and closing

Programmable automatic partial closing

Separate OPEN - CLOSE inputs and PP - PARTIAL input

Safety edge 8,2Kohm NC - STOP - photo 1 and photo 2

Inputs and safety devices LED visualization

Flashing light output fixed or flashing

LED courtesy light or open gate indicator output

3 digits display

Optional photo test

Optional test for safety edge

New plug-in radio receiver 4 channels RX4K

## MODELS

CODE	DESCRIPTION
CT102B	For one motor for sliding gate, overhead door, 230 Vac, with electronic clutch and connector for receiver, slowdown in opening and closing

## CT102B

### ELECTRICAL DATA

input power	Vac/Hz	230/50
output power accessories	Vdc	24
max motor power	W	700
max working time	sec	adjustable
max pause time	sec	0 - 900
obstacle detection		yes

### GENERIC DATA

protection degree	IP	-
dimensions (L - D - H)	mm	120 - 90 - 30
operating temperature	°C	-20 + 55