

TURBO 160

ELECTROMECHANICAL GEAR MOTOR FOR SLIDING GATES UP TO 1600 Kg, 230 Vac



PLUS

With slowdown function both in opening and closing to preserve gate integrity


Easy maintenance thanks to the horizontal control unit position

With fixing plate included

With 230 Vac CT102B control unit with integrated display

Electronic and mechanical parts well protected from weather conditions

MODELS

CODE	DESCRIPTION	PCS PALLET
SC162	For sliding gates up to 1600 Kg, 230 Vac motor, control unit with slowdown and electric limit switch	36 



LCD display



Bronze gears



Sturdy and performing motors

TECHNICAL DATA

SC162

MECHANICAL DATA

speed	cm/s	16
torque	Nm	40
working cycle	%	30

ELECTRICAL DATA

control board		CT102B
power	Vac	230
consumption	A	2,5
absorbed power	W	600
capacitor	µF	20
thermoprotection	°C	150

GENERIC DATA

protection degree	IP	44
dimensions (L - D - H)	mm	320 - 184 - 260
weight	kg	14,5
working temperature	°C	-20 + 55
gate maximum weight	Kg	1600

ACCESSORIES



CREM-12 *
M4 zinc coated rack 30x12
mm L=1000 mm

€/m



RX4K
4 channels plug-in receiver, fix
or rolling code, 433MHz

PC 1



LUMY-230E
230 Vac flashing light, 25 W,
with antenna


PC 1



TS
Warning board

PC 1

DIMENSIONS

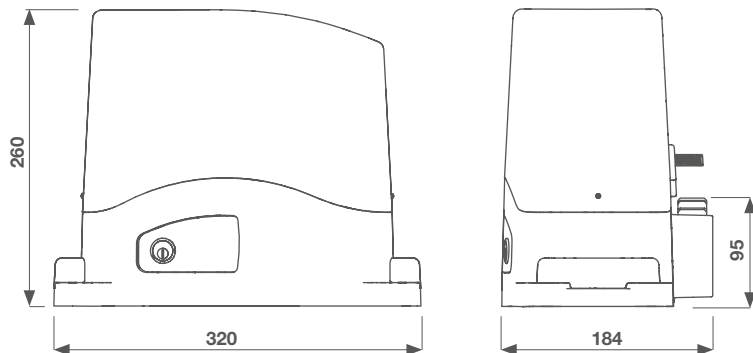

* Pack of 4 pcs